
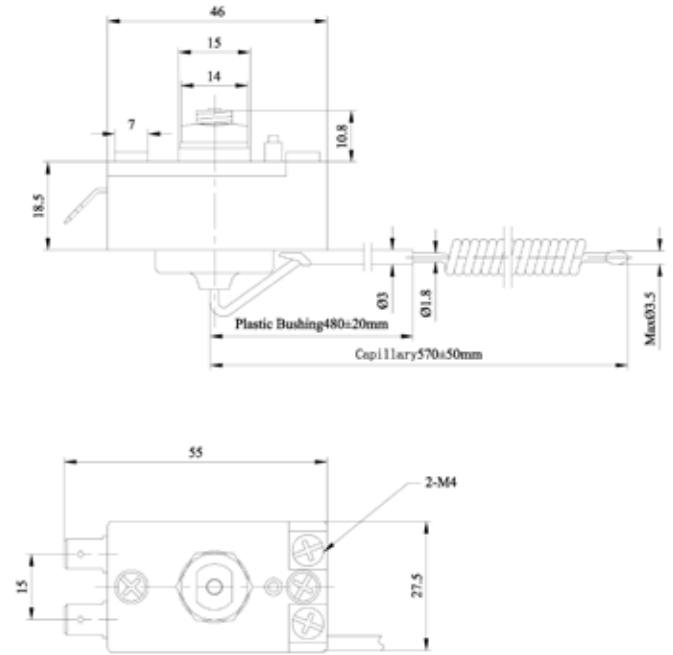


Capillary Thermo Cut-Off

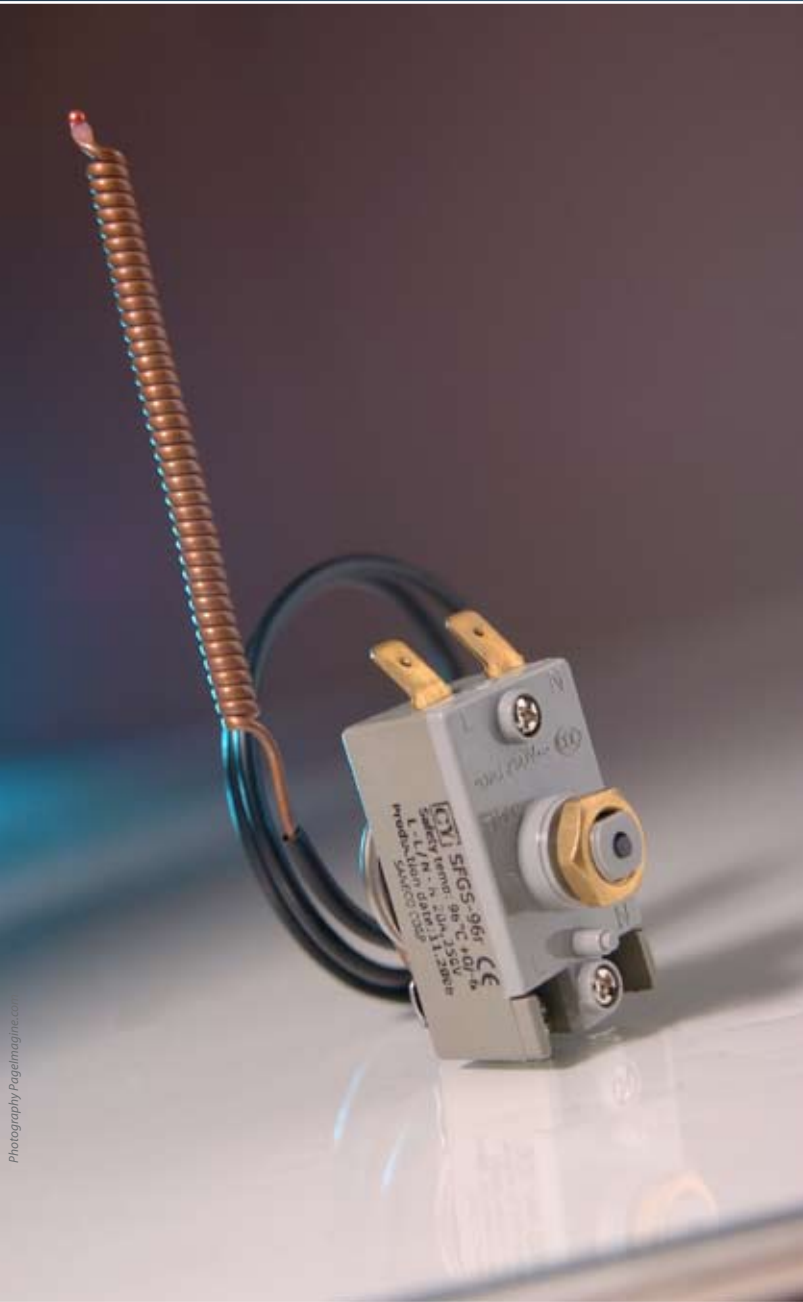

Capillary Thermo Cut-off

Application
Electric water heaters

Description
Safety temperature controller with manual reset (capillary type)

- Features**
- Independent over heating safety control with rapid response
 - Standard preset or OEM customized safety temperature
 - Manual reset
 - Standard M4 mounting brackets
 - RoHS compliant (non-RoHS also available)

Weight: ~100g

Technical Characteristics

Operational Properties	Model	SFGS-100	SFGS-96	SFGS-84
	Range		100+0/-6° C	96+0/-6° C
Electric Strength	Voltage	AC 240V ~ 50Hz		
	Amps	COSØ=1 L-L A20; N-N A20		
Contact Resistance		Less than 50Ω		
Insulation resistance		More than 100MΩ at DC 500V		
Insulation Withstand Voltage		Withstand AC 1500V for 1 min		
Temperature Change Pace		1° C/min		
Contact Life		More than 1000 times		
Capillary Length		530±25		
Bulb & Capillary material		Copper or Stainless Steel		
Electrical Connectors		One brass or nickel plated fast-on terminal - 6.35 mm		
Mounting		Standard M4 mounting brackets - 28 ± 0.5 mm		

* also available for AC 110V

Minimum Order Quantity: 5,000 pcs. per type.



686 Wu Zhong Road
Building E, F8, Suite 808
Shanghai, 201103 China

Copyright © 2007 Saneco Corporation LTD.
Products specifications subject to change / modification

Tel: (+86 21) 6406 9515
Fax: (+86 21) 6406 9516
sales@sanecocorp.com
sanecocorp.com

saneco
Corporation Ltd.